

# PHOTOELECTRIC SMOKE ALARM



MODEL:

# R10RFP

SMOKE ALARM  
WITH 10 YR LITHIUM  
WIRELESS RF



**red** SMOKE ALARMS



# PROFESSIONAL

SMOKE ALARMS

- ✓ R10RFP Smoke Alarm
- ✓ 10 YR 3V Lithium Battery
- ✓ 120 MMTwist Base
- ✓ Built In RF Interconnection
- ✓ Dual Mesh Insect Guard



10 Year  
Lithium Battery



Remote Control  
Ready



RF Wireless  
Built-in



20 - 40 m<sup>2</sup>  
Coverage

## DESIGNED BY ELECTRICIANS FOR ELECTRICIANS



ASK ABOUT OUR CONTRACTOR'S

## RED DOLLARS REWARD PROGRAM

EARN UP TO \$5 PER ALARM

Find out more on our website [www.thinkredrewards.com.au](http://www.thinkredrewards.com.au)

PHOTOELECTRIC  
**SMOKE  
ALARM**



10 Year  
Lithium Battery



RF Wireless  
Built-in



Remote Control  
Ready



20 - 40 m<sup>2</sup>  
Coverage




**MODEL:  
R10RFP**

**Key Information**

Device application	Early Detection of Smouldering Fires and Open Fires
Sensor type	Photoelectric Sensor
Colour	White
Quantity	1
Packaging type	Carton

Power Supply	DC Sealed Battery
Battery Type	3V Lithium Battery
Battery Life	10 YR
Operating Current	< 100mA at 3V
Standby Power	< 0.04mW
Detection Type	Smoke
Function	Hush Function Smoke Detection Local Alarm
Response Time	Approx. 8 SEC
Noise Level	85 dB at 3M Minimum
Time Delay Range	10 MIN: for Hush 10 HR: for Silence 72 HR: for Memory Function
Control Type	Button for Test / Hush Function
Radio Frequency	433.92 MHz
Number of Devices	Wireless Interconnected up to 40 Pieces
Operating Distance	30M Indoor Use Line of Sight 100M in Free Field
Local Signal	Sound: Alarm Sound: Signal Visual: 1 LED (Red) for Warning and Low Battery
Type of Installation	Indoor
Device Mounting	Surface
Mounting Support	Wall-mount Ceiling
Fixing Type	By Screws
Alarm Diameter	120 MM
Protrusion from Ceiling	34 MM
Ambient Air Temperature for Operation	0...45°C
Relative Humidity	5...95%
Product Certifications	CSIRO
Standards	AS 3786:2014+A1:2015+A2:2018

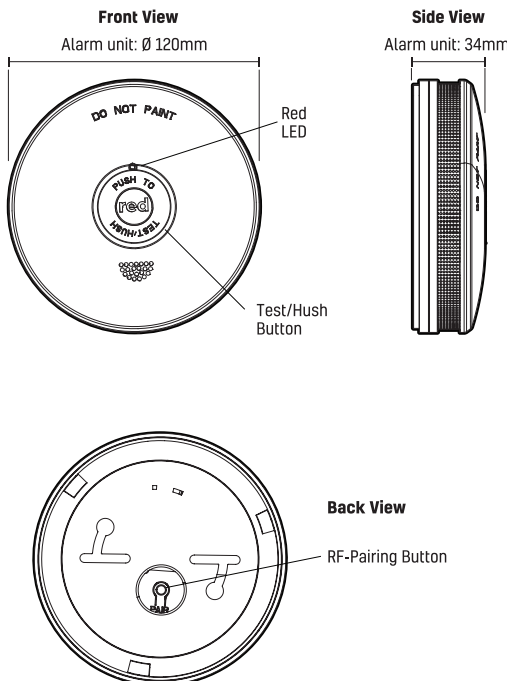

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability of reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Red Smoke Alarms PTY. LTD nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

